



企业使命:为道路运输及非道路作业机械提供可信赖的车轮产品
Corporate mission: Provide reliable wheel products for road transportation and off-road operation machinery

企业愿景:成为客户满意,受人尊重的高质量企业
Corporate Vision: To become a high-quality enterprise that satisfies customers and is respected by others

价值观:团结、激情、务实、创新
Values: Unity, passion, pragmatism, innovation



JINYUE AUTO
— 近悦汽车部件 —

JINYUE



CONTENTS

目录



关于近悦 01

About Jinyue 01

拖拉机系列 03-13

Tractor series 03-13

先进设备 02

Advanced Equipment 02

收割机系列 14-16

Harvester series 14-16

ABOUT US



SHANDONG JINYUE RUBBER CO., LTD

Shandong Jinyue Rubber Co., Ltd. is an enterprise specialized in the research and development, manufacturing and domestic and foreign trade of tires and wheels. The company's product range is rich, covering all-steel radial truck tires, passenger car tires, bias truck tires, engineering tires, aluminum alloy wheels and large agricultural machinery wheels.


The company's OHNICE and GUOYOU brands have successfully passed many authoritative certifications such as ISO9001, CCC, ECE, DOT, INMETRO, GCC, SNI, SONCAP and SGS. With excellent product quality and high-quality service, OHNICE tires have won wide acclaim in more than 80 countries and regions such as the Americas, Europe, the Middle East, Africa and Southeast Asia. At the same time, the large agricultural machinery wheels independently developed and produced by the company are also highly favored in regions such as Russia and South America.

Since its establishment, the company has always been committed to providing customers with one-stop high-quality services. We pay close attention to the needs of each customer. In particular, we focus on providing more value-added services to customers in all aspects, including providing reliable quality assurance, strictly controlling delivery time, continuously tracking product quality and actively collecting use feedback for each order.

The company has a professional team. With its superb technology and rich experience, it has created tires and wheel products with excellent quality and reliable performance. In market competition, Shandong Jinyue Rubber Co., Ltd. shows significant advantages with its strong research and development strength, strict quality control system and high-quality customer service. In the future, the company will continue to work hard and strive to make OHNICE, GUOYOU tires and Jinyue wheels become first-class world-renowned brands at home and abroad in the near future.



/// 先进设备 ADVANCED EQUIPMENT

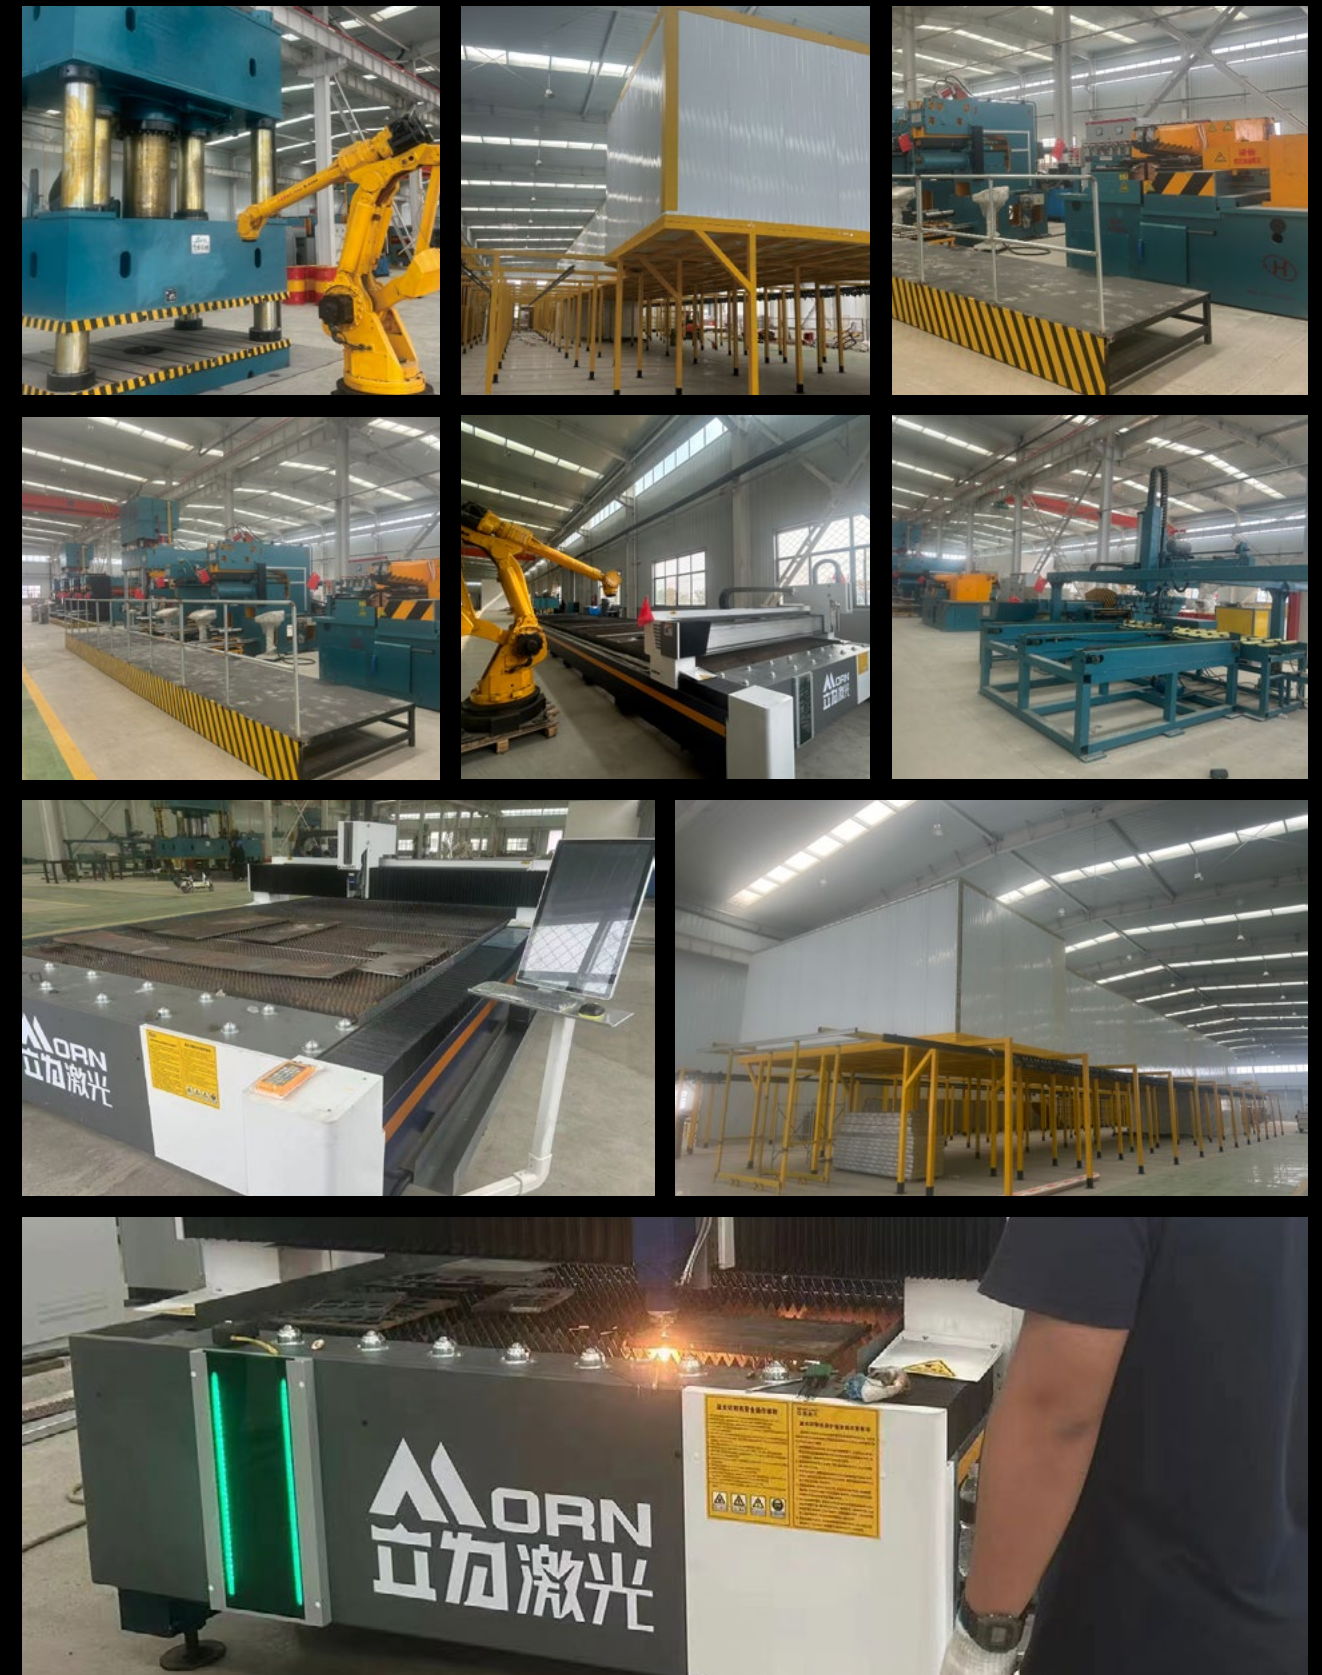

拖拉机系列TRACTOR
SERIES



车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
4.00Ex15	5.00-15	5	15	140	96	25	3.5	5
3.00Dx16	4.00-16	5	20	140	94	27	3.5	6
4.00Ex16	5.00-16	4	17	127	92.2	10	3.5	5
4.00Ex16	5.00-16	5	15	140	96	25	3.5	5
4.00Ex16	5.00-16	5	17	140	93	25	3.5	5
4.00Ex16	5.00-16	5	20	140	94	27	3.5	6
4.50Ex16	6.50-16	6	20	152	112	25	3.5	5
4.50Ex16	6.50-16	6	14	180	141	25	4	6
4.50Ex16	6.50-16	5	15	140	92	15	4	6
4.50Ex16	6.50-16	6	17	161	102	65	4	6
4.50Ex16	6.50-16	6	17	161	102	25	3.5	6
4.50Ex16	6.50-16	5	15	140	92	15	4	6
5.50Fx16	7.50-16	6	19	152	117.7	0	4	8
5.50Fx16	7.50-16	5	17.5	205	156	15	4	8
5.50Fx16	7.50-16	6	20	152.4	110	60	3.5	6
5.50Fx16	7.50-16	5	15	140	92	10	4	6
5.50Fx16	7.50-16	6	17	180	141	36	4	6
5.50Fx16	7.50-16	6	15	180	141	36	4	6
5.50Fx16	7.50-16	6	15	152.4	117.4	0	4	6
5.50Fx16	7.50-16	6	17	161	102	50	4	5
5.50Fx16	7.50-16	6	14.5	161	100.5	30	4	5
5.50Fx16	7.50-16	6	14	180	141	25	4	5
9.75x16.5	12.5-16.5	6	13	152.4	117.5	8	4	10
W9x18	11.2-16	6	17	161	102	136	4	8

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
5.50Fx20	7.50-20	6	19	180	141	10	4	8
5.50Fx20	7.50-20	6	15	180	141	30	4	8
5.50Fx20	7.50-20	5	19	175	136	25	4	7
5.50Fx20	7.50-20	6	19	180	141	10	4	8
5.50Fx20	7.50-20	5	19	175	136	25	4	7
5.50Fx20	7.50-20	6	15	180	141	46	4	8
5.50Fx20	7.50-20	6	19	152	117.7	10	8	4
5.50Fx20	7.50-20	6	15	180	141	10	8	4
W7x20	8.3-20	6	17	161	102	65	3.5	8
W7x20	8.3-20	6	17	161	102	5	3.5	8
W7x20	8.3-20	6	15	161	102	50	3.5	8
W7x22	8.3-22	6	14.5	152.4	117.6	21	3.5	8
W7x22	8.3-22	6	15.75	141	95	62.25	3.5	8
W7x24	8.3-24	6	17	161	100	15	3.5	8
W7x24	8.3-24	8	16.5	330	290.5	161.6	4	9
W7x24	8.3-24	6	17	285	250	20	3.5	10
W7x24	8.3-24	8	17.5	203.2	152.4	40	4	10
W7x24	8.3-24	6	17	285	250	123.5	4	8
W7x24	8.3-24	6	17	165	130	54	4	8
W7x24	8.3-24	0.8	19	203.2	152.6	5	3.5	8
W7x24	8.3-24	6	18	165	130	54	3.5	8
W7x24	8.3-24	6	18	165	130	5	3.5	8
W8x24	9.5-24	6	20	205	161	68.7	4	9
W8x24	9.5-24	8	17	330	290.5	174.3	4	9

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W10x24	11.2-24	6	18.8	165	120	0	4	8
W10x24	11.2-24	8	17	335	290.5	213	4	9
W10x24	11.2-24	8	21	275	22	21	4	9
W10x24	11.2-24	8	17.5	203.2	152.4	31	4	10
W10x24	11.2-24	8	17.5	203.2	152.4	83	4	10
W10x24	11.2-24	8	17	330	290.5	26	4	9
W10x24	11.2-24	8	17	330	290.5	81	4	8
W10x24	11.2-24	8	19	275	221	30.5	4	8
W10x24	11.2-24	8	17	330	290.5	48.5	4	8
W10x24	11.2-24	8	19	275	221	1.5	4	8
W10x24	11.2-24	8	17	330	290.5	30.5	4	8
W10x24	11.2-24	6	17	285	250	42.5	4	8
W10x24	11.2-24	8	17	330	290.5	4	4	8
W10x24	11.2-24	8	19	275	221	26	4	8
W10x24	11.2-24	8	17	330	290.5	4	4	8
W10x24	11.2-24	8	19	203.2	152.6	4	4	8
W10x24	11.2-24	8	19	275	221	4	4	8
W10x24	11.2-24	8	18	165	130	63.5	4	8
W12x24	13.6-24	8	17	330	290.5	26	4	9
W12x24	13.6-24	8	21	275	221	9	4	10
W12x24	13.6-24	8	17	330	290.5	26	4	9
W12x24	13.6-24	8	16.5	330	290	87	4	10
W12x24	13.6-24	8	22	275	221	87	4	10
W12x24	13.6-24	8	16.5	330	290	87	4	10
W12x24	13.6-24	8	17	330	290.5	101	4	8
W12x24	13.6-24	8	17	330	290.5	65	4	12
W12x24	13.6-24	8	18.8	203.2	152.6	24	4	4
W12x24	13.6-24	8	17	330	290.5	4	4	4
W12x24	13.6-24	8	17	330	290.5	55.4	4	4
W12x24	13.6-24	8	17	330	290.5	90.4	4	4
W12x24	13.6-24	8	18.8	203.2	152.6	24	4	4

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W12x24	13.6-24	8	17	330	290.5	39	4	9
W12x24	13.6-24	8	18.8	203.2	152.6	26	4	8
W12x24	13.6-24	8	17	330	290.5	39	4	9
W12x24	13.6-24	8	17.2	203.2	152.4	106.4	4.5	10
W13x26	14.9-24	8	18.8	203.2	152.6	26	4	8
W13x26	14.9-24	8	26	190	145	90	4	14
W11x26	12.4-26	8	17	330	290.5	31.5	4.5	8.3
W11x26	12.4-26	8	17	330	290.5	104.7	4.5	9
W11x26	12.4-26	8	17	330	290.5	25	4.5	9
W12x26	13.6-26	8	24	275	221	40	4	10
W13x26	14.9-26	8	17	330	290.5	26	5	9
W13x26	14.9-26	8	17	330	290.5	47	4	9
W13x26	14.9-26	8	17	330	290.5	47	4.5	9
W13x26	14.9-26	8	17	330	290.5	178	4.5	9
W13x26	14.9-26	8	17	330	290.5	43	5	10
W13x26	14.9-26	8	17	330	290.5	21	5	10
W13x26	14.9-26	10	21	335	281.5	21	5	10
W13x26	14.9-26	8	17	330	290.5	26	5	9
W13x26	14.9-26	12	17	535	500	13	5	8
W15x26	16.9-26	10	21	335	105	21	5	10
W10x28	11.2-28	8	17	203.2	151.5	4	4	10
W10x28	11.2-28	6	18.8	165	120	76	4	10
W10x28	11.2-28	5	18.8	165	120	76	4	10
W10x28	11.2-28	6	18.8	165	120	100	4	10
W10x28	11.2-28	8	17	330	290.5	26	4	9
W10x28	11.2-28	8	18.8	203.2	152.4	50	4	8
W10x28	11.2-28	8	21	275	221	16.5	4	9
W10x28	11.2-28	8	17	330	290.5	26	4	9
W10x28	11.2-28	8	18.8	203.2	152.6	4	4	8
W10x28	11.2-28	8	20	203.2	163.5	75	4	8
W10x28	11.2-28	8	17	330	290.5	64.5	4	9

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W10x28	11.2-28	8	20	203.2	163.5	249	4	8
W10x28	11.2-28	10	21	335	281.5	54	4	9
W10x28	11.2-28	8	20	203.2	163.5	6	4	8
W10x28	11.2-28	8	18.8	203.2	152.6	36	4	8
W10x28	11.2-28	10	24	335	281	206	4	10
W11x28	12.4-28	8	17	203.2	151.3	4	4	10
W11x28	12.4-28	8	21	210	140.3	85.5	5	12
W12x28	13.6-28	8	17	203.2	151.3	4	4	10
W12x28	13.6-28	10	24	275	221	40	4	10
W12x28	13.6-28	8	17	330	290.5	102	5	9
W12x28	13.6-28	8	20	203.2	152.4	30	5	10
W13x28	14.9-28	10	23	335	281	30	4	9
W13x28	14.9-28	10	23	335	281	155.1	4	10
W13x28	14.9-28	10	23	335	281	190	5	10
W13x28	14.9-28	8	20	203.2	163.5	190.1	5	10
W13x28	14.9-28	8	17	330	290.5	21.5	5	9
W13x28	14.9-28	8	20	203.2	152.4	30	5	10
W13x28	14.9-28	10	21	335	281.5	21	5	9
W13x28	14.9-28	10	23	335	281	10	10	4.5
W14x28	16.9-28	8	20	203.2	152.4	23.3	5	9
W15x28	16.9-28	10	23	335	281	180	4	10
W15x28	16.9-28	10	23	335	281	31	5	9
W15x28	16.9-28	10	23	335	281	215	5	10
W15x28	16.9-28	10	21	335	281.5	36	5	10
W12x30	13.6-30	8	21	203.2	152.4	149.5	5	10
W12x30	13.6-30	8	21	203.2	152.4	30	5	10
W12x30	13.6-30	8	19	203.2	150.1	20	5	10
W12x30	13.6-30	8	17.5	203.2	152.4	70.5	5	12
W12x30	13.6-30	8	24	250	199	0	4	10
W12x30	13.6-30	8	21.4	203.2	152.6	75	4	10
W12x30	13.6-30	8	21	203.2	152.4	20	5	10

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W12x30	13.6-30	8	32	222.25	145	70	5	10
W12x30	13.6-30	8	19	203.2	150.1	20	5	10
W14x30	16.9-30	8	19	203.2	150.1	70	5	10
W14x30	16.9-30	8	17.5	203.2	152.4	70.5	5	12
W14x30	16.9-30	8	19	203.2	152.4	58	5	12
W14x30	16.9-30	8	19	203.2	152.4	193.3	5	12
W14x30	16.9-30	8	21.4	203.2	152.4	77	4	10
W14x30	16.9-30	8	21	2056	150	70	5	7
W14x30	16.9-30	8	19	203.2	150.1	70	5	10
W15x30	16.9-30	8	19	203.2	152.4	3.5	5	12
W15x30	16.9-30	10	23	335	281	215.4	5	12
W15x30	16.9-30	8	21.5	203.2	152.4	206.5	5	12
W15x30	16.9-30	8	19	203.2	152.4	165.5	5	12
W15x30	16.9-30	10	23	335	281	13	5	14
W15x30	16.9-30	10	23	335	281	19	5	14
W15x30	16.9-30	10	23	335	281	13	5	14
W15x30	16.9-30	10	24	335	281	45	5	14
W15x30	16.9-30	12	26	425	371.5	45	5	14
W16x30	16.9-30	10	24	335	281	13	5	14
W16x30	16.9-30	8	21.5	203.2	152.4	220	5	12
W16x30	18.4-30	8	21.5	203.2	152.4	149.5	5	12
W16x30	18.4-30	8	19	203.2	152.4	58	5	12
W16x30	18.4-30	8	19	203.2	152.4	218.75	5	12
W8x32	18.4-30	6	19	180	141	60	4	10
W8x32	9.5-32	6	19	200	125	25	4	10
W8x32	9.5-32	8	21.5	275	221	15	4	10
W8x32	9.5-32	8	16.5	330	290.5	114.5	4	10
W8x32	9.5-32	8	19	330	290.5	113	4	10
W8x32	9.5-32	10	21.5	335	281.5	40	4	10
W8x32	9.5-32	6	19	180	141	60	4	10
W10x32	11.2-32	8	17	203.2	151	4	5	10

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W10x32	11.2-32	8	19	203.2	150.1	20	5	10
	11.2-32	8	32	222.25	164	30	4	10
W10x32	11.2-32	8	20	203.2	152.4	31	4	9
W10x32	11.2-32	8	19	203.2	150.1	20	5	10
W10x32	11.2-32	5	19	175	136	18	5	10
W10x32	11.2-32	8	19	330	290.5	68	4	10
W10x32	11.2-32	8	19	330	290.5	68	4	10
W10x32	11.2-32	8	23.5	275	221	45	4	10
W10x32	11.2-32	8	21.5	275	221	53	5	10
W10x32	11.2-32	10	21.5	335	281.5	48	5	10
W10x32	11.2-32	8	20	203.2	152.6	30	5	10
W10x32	12.4-32	8	19.5	203.2	152.6	25.4	5	9
W11x32	16.9-34	8	19	203.2	150.1	70	5	10
W15x34	16.9-34	8	22	275	221	20	5	12
W15x34	16.9-34	8	24	250	199	116	6	4
5.50Fx16	16.9-34	8	21	210	140.3	85.5	5	12
W15x34	16.9-34	8	19	203.2	152.4	57.5	5	12
W15x34	16.9-34	8	19	203.2	152.4	204	5	12
W15x34	16.9-34	8	19	203.2	150.1	70	5	10
W15x34	16.9-34	6	19	410	335	70	5	10
W15x34	16.9-34	8	21	203.2	152.4	23	5	12
W15x34	16.9-34	8	23	280	220.5	23	5	12
W15x34	16.9-34	8	21	275	221.3	20	5	12
W15x34	16.9-34	8	21	203.2	152.4	266.5	5	12
W15x34	16.9-34	8	23	280	220.5	252.5	5	12
W15x34	16.9-34	8	23	280	220.5	252.5	5	12
W15x34	16.9-34	10	26	335	281.5	77	5	12
W15x34	16.9-34	8	21	203.2	152.4	23	5	12
DW15x34	16.9-34	8	19	203.2	152.6	18	5	10
DW15x34	16.9-34	8	21.4	203.2	152.6	75	5	12
DW15x34	16.9-34	10	24	335	281.5	314.5	5	12

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W11x36	12.4-36	10	24	335	282	236.7	4	10
W11x36	12.4-36	8	19	203.2	152.4	79	4	12
W10x38	11.2-38	8	17	203.2	152.4	44	4	6
W10x38	11.2-38	10	23	335	282	273	5	12
W10x38	11.2-38	10	26	335	281.5	100	4	12
W10x38	11.2-38	8	21	275	221	112.5	4	10
W10x38	11.2-38	8	21	203.2	140	180	5	12
W10x38	11.2-38	10	22	335	282	82	5	12
W10x38	11.2-38	12	22	426	371	108	5	12
W10x38	11.2-38	8	18	330	292	82	5	12
W10x38	11.2-38	10	22.5	335	282	100	5	12
W10x38	11.2-38	8	18	405	362	52	5	12
W10x38	11.2-38	10	23	335	281	152	5	12
W10x38	11.2-38	10	21.5	335	281	152	5	12
W10x38	11.2-38	8	22	275	220.8	198	5	12
W10x38	11.2-38	10	23	335	282	202	5	12
W10x38	11.2-38	10	22	335	282	108	5	12
W10x38	11.2-38	8	18	405	362	100	5	12
W11x38	12.4-38	8	21	203.2	152.4	16	4	12
W11x38	12.4-38	8	19	203.2	150.4	140	4	12
W11x38	12.4-38	8	20	224	180	98	4	10
W11x38	12.4-38	8	32	275	214	259.8	5	6
W11x38	12.4-38	8	24	250	199	76.5	4	6
W11x38	12.4-38	8	21.4	203.2	152.6	75	4	12
W11x38	12.4-38	8	21	295	240	236	5	10
W11x38	12.4-38	8	19	223	180	33.2	5	10
W11x38	12.4-38	8	21	335	281.5	16	5	12
W11x38	12.4-38	8	21	335	281.5	16	5	12
W11x38	12.4-38	8	23	280	220.5	91.5	4	12
W11x38	12.4-38	8	23	280	220.5	200.5	4	12
W11x38	12.4-38	8	21.5	203.2	141	30	5	12

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W11x38	12.4-38	8	24	275	221	3	5	12
W12x38	13.6-38	8	19	203.2	150.1	21.1	5	10
W12x38	13.6-38	8	19	203.2	150.1	158	5	10
W12x38	13.6-38	8	19	203.2	150.1	21.2	5	10
W12x38	13.6-38	8	21	203.2	152.4	30	5	12
W12x38	13.6-38	8	23	280	220.5	30	5	12
W12x38	13.6-38	8	21	203.2	152.4	30	5	12
W12x38	13.6-38	8	20.5	203.2	152.4	69.5	5	10
W12x38	13.6-38	8	20.5	203.2	152.4	213	5	10
W12x38	13.6-38	8	20.5	203.2	152.4	69.5	5	10
W14x38	15.5-38	8	21.4	203.2	152.6	75	4	12
W15x38	16.9-38	8	19	203.2	150.1	20	5	12
W15x38	16.9-38	8	23	295	240	96	5	12
W15x38	16.9-38	12	22	404	355	185	5	12
W15x38	16.9-38	8	19	203.2	150.1	120	5	12
W15x38	16.9-38	8	19	203.2	150.1	20	5	12
W15x38	16.9-38	8	23	280	220.5	169.5	5	12
W15x38	16.9-38	10	26	335	281.5	26	5	12
W15x38	16.9-38	10	26	335	281.5	26	5	12
W15x38	16.9-38	10	26	335	281.5	5.5	5	12
W15x38	16.9-38	10	26	335	281.5	46.5	5	12
W15x38	16.9-38	8	21	203.2	152.4	22	5	12
W15x38	16.9-38	10	26	335	281.5	26	5	12
W15x38	16.9-38	10	26	335	281.5	26	5	12
W15x38	16.9-38	10	26	335	281.5	21	5	12
W15x38	16.9-38	10	26	335	281.5	144	5	12
W15x38	16.9-38	10	26	335	281.5	16	5	12
W15x38	16.9-38	8	21	203.2	152.4	88	5	12
W16x38	18.4-38	8	21	203.2	141	110	5	12
W16x38	18.4-38	8	21	275	221	250	5	12
W16x38	18.4-38	8	23	295	240	96	5	12

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W16x38	18.4-38	10	22	480	421.5	94	5	12
W16x38	18.4-38	10	26	335	281.5	115	5	12
W16x38	18.4-38	8	21	295	240	19	5	12
W16x38	18.4-38	8	21	295	240	173	5	12
W16x38	18.4-38	8	21	275	221	44	6	16
W18x38	20.8-38	10	220+1	480	421.5+0.5	376.5	5	12
W18x38	20.8-38	10	26	335	281	96	5	12
W18x38	20.8-38	10	26	335	281	146	5	12
W18x38	20.8-38	10	26	335	281.5	115	5	12
W18x38	20.8-38	10	26	335	281.5	46.5	5	12
W18x38	20.8-38	10	26	335	281.5	205.5	5	12
W15x42	16.9-42	8	24	275	221	106	6	14
W16x42	18.4-42	8	17.5	203.2	150.1	92.5	5	12
W16x42	18.4-42	10	26	335	281	150	6	14
DW16x42	18.4-42	10	24	335	281.5	38	5	12
DW16x42	18.4-42	10	24	335	281.5	14	5	12
DW16x42	18.4-42	10	24	335	281.5	177	5	12
W18x42	20.8-42	10	23	335	281.5	190.5	6	16
W18x42	20.8-42	10	23	335	281	352	6	18
W18x42	20.8-42	10	26	335	281	167.5	6	18
W18x42	20.8-42	12	26	425	371	284.5	6	16
W18x42	20.8-42					19	6	
W18x42	20.8-42	10	26	335	281	240	6	16
W18x42	20.8-42	10	26	335	281	240	6	16
DW20x42	23.1-42	10	23	335	281	310	6	18
DW20x42	23.1-42	12	26	425	371	50	6	16
W7x48	8.3-48	8	21.5	203.2	152.6	43	5	12
W7x48	8.3-48	10	26	335	281	145	6	14
W7x48	8.3-48	8	21.5	203.2	152.6	165	5	12
W8x48	9.5-48	8	24	250	199	18	5	12
W8x48	9.5-48	8	19	203.2	150.1	130	5	12

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W8x48	9.5-48	8	23	203.2	152.4	190	5	12
W10x48	11.2-48	8	20	203.2	150.5	48	5	12
W10x48	11.2-48	8	23	275	221	150	5	12
W10x48	11.2-48	8	21.5	203.2	152.6	82	5	12
W10x48	11.2-48	10	25	335	281	94	5	12
W10x48	11.2-48	12	23	404	352	21	5	12
W10x48	11.2-48	8	21.5	203.2	152.6	40	5	12
W10x48	11.2-48	10	24	335	281.5	308	5	12
W10x48	11.2-48	10	26	335	281.5	40	5	12
W13x48	14.9-48	10	26	335	282	110	6	12
W13x48	14.9-48	10	24	335	282	83	6	14
W13x48	14.9-48	8	21	295	240	110.4	6	12
W13x48	14.9-48	8	22	275	222	183	6	14
W13x48	14.9-48	10	24	335	282	180	6	14
W13x48	14.9-48	10	26	335	282	133	6	12
W13x48	14.9-48	8	22	275	222	183	6	14
W13x48	14.9-48	10	26	335	282	31	6	14
W13x48	14.9-48	10	22	480	421	245	6	14
W13x48	14.9-48	8	21.5	203.2	152.6	395	5	12
W13x48	14.9-48	10	24	335	282	133	6	14
W13x48	14.9-48	8	20	275	222	110	6	12
W13x48	14.9-48	12	24	814	768	98	6	12
W13x48	14.9-48	10	24	814	768	98	6	12
W10x54	11.2-54	8	24	250	199	193	5	12
W10x54	11.2-54	8	19	223	180	123	5	12
W10x54	11.2-54	8	20	275	222	62	5	12
W10x54	11.2-54	10	24	335	282	133	5	12
W10x54	11.2-54	10	24	335	282	185	5	12
W10x54	11.2-54	8	21	203.2	152.4	20	5	13
W10x54	11.2-54	8	21.5	203.2	152.6	82	5	12
W11x54	12.4-54	10	24	335	282	221.5	5	14



收割机系列 HARVESTER SERIES

车轮规格 Wheel size	配用轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
10LBx15	11-15	5	17.5	205	156	6.5	4	6
8.00x15.3	10-15	6	17	162	120	110	4	6
9.00x15.3	10-15	5	17.5	205	158.5	0	4	6
9.00x15.3	10-15	5	15	140	110	50	4	6
9.00x15.3	10-15	6	21.5	205	153	118.4	4	8
9.00x15.3	10-15	6	17	162	120	114.3	4	8
9.00x15.3	10-15	6	17	162	120	114.3	4	8
9.00x15.3	10-15	5	17.5	205	152	6.5	4	6
9.00x15.3	10-15	5	17.5	205	158.5	0	4	6
9.00x15.3	10-15	5	17	205	160	0	4	6
9.00x15.3	10-15	5	21	155	122	5.2	4	6
DK9-18	11.2-18	8	17	203.2	152.4	131.6	5	6
DK9-18	11.2-18	8	17	203.2	152.4	97	5	6
DK9-18	11.2-18	8	17	203.2	152.4	131.6	5	6
DK9-18	11.2-18	8	17	203.2	152.4	97	5	6
DK9-18	11.2-18	8	17	203.2	152.4	131.6	5	6
DK9-18	11.2-18	8	17	203.2	152.4	97	5	6
DK9-18	11.2-18	8	17	203.2	152.4	131.6	5	6
DK9-18	11.2-18	8	17	203.2	152.4	97	5	6
W8x20	9.5-20	8	17	330	290.5	155.6	4	8
W8x20	9.5-20	8	17	330	290.5	45	4	8
W8x20	9.5-20	8	17	330	290.5	0	4	8
W8x20	9.5-20	6	17	180	141	0	3.5	6
W8x20	9.5-20	6	17	180	141	20	4	8

车轮规格 Wheel size	配备轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
W8x20	9.5-20	8	23	330	290	30	4	8
13.00x20	16/70-20	10	23	335	281.5	22.75	6	12
DK14-20	16/70-20	6	20	230	180	130.5	5	8
DK14-20	16/70-20	6	20	230	180	199.5	5	8
W10x24	11.2-24	8	17	330	290.5	0	4	10
W10x24	11.2-24	10	21	335	280	0	4	10
W10x24	11.2-24	8	19	330	290.5	56.5	4	9
W10x24	11.2-24	6	17	162	120	200	4	10
W10x24	11.2-24	6	17	180	141	52	4	10
W12x24	13.6-24	10	21	335	280	156.5	4	12
W12x24	13.6-24	10	21	335	281	61	5	12
W14Ax24	15-24	8	38	210	145	70.8	6	8-6
W14Ax24	15-24	8	38	210	145	163.8	6	8-6
W14Ax24	15-24	8	38	162	145	118	6	8-8
W14Ax24	15-24	8	20.5	210	140	124.5	6	8
DT14-24	15-24	12	17.5	535	500.5	5	5	
DT14-24	15-24	8	23	240	172/160	8	5	8-6
DT14-24	15-24	8	23	240	160/172	8	5	8-6
DT14-24	15-24	8	23	210	139.6/154.6	8	5	8-6
DT14-24	15-24	8	32	210	145/160	8	5	8-6
DT14-24	15-24	8	22	240	160.5	10	5	10-6
DT14-24	15-24	8	22	240	160.5	10	5	10
W15x24	16.9-24	8	21	275	221	119.5	4	12
W15x24	16.9-24	8	22	275	221	266	5	12
W15x24	16.9-24	10	24.5	275	221	19	5	12
DW15x24	16.9-24	8	22	275	221	266	5	12
W17Ax24	19.5L-24	8	32	210	145	145	6	8-6
W17Ax24	19.5L-24	8	22	210	145	151	6	8-6
DW20x26	23.1-26	8	21	275	221	0	6	14

车轮规格 Wheel size	配备轮胎 Equipped with tyre	螺栓孔 Bolt hole			中心孔直径 Center hole diameter	偏距 Setover	材料厚度 Bolt hole	
		孔数 Hole count	直径 Diameter	分布圆直径 Distribution circle diameter			轮辋 Wheel rim	轮辐 Wheel arm
DW20x26	23.1-26	8	21.5	275	221	60	6	16
DW20x26	23.1-26	8	20	275	221	36	6	14
DW20x26	23.1-26	8	20	275	221	37	6	14
DW25x26	28L-26	8	20.5	275	221	317.5	6	16
DW25x26	28L-26	8	20.5	275	221	66	6	16
DW25x26	28L-26	8	21.5	275	221	0	6	16
W8x28	9.5-26	8	19	330	290.5	18	4	10
W10x28	11.2-28	8	18	330	290.5	30	4	10
W10x28	11.2-28	8	21.5	275	221	60	4	10
W10x28	11.2-28	10	21	335	281.5	50	4	9
W10x28	11.2-28	8	20	190	145	33	4	12
W10x28	11.2-28	8	21.5	275	221	381	4	10
4.50Ex29	6.00-29	6	19	161	115	70.8	3.5	10
W16x30	18.4-30	8	22	203.2	152.4	4	5	10
DW16x30	18.4-30	8	26	222.25	164	75	5	13.5
DW16x30	18.4-30	8	20	275	221	60	5	14
DW16x30	18.4-30	8	21	275	221	75	4	13
DW16x30	18.4-30	8	21	275	221	75	4	13
DW16x30	18.4-30	8	21	275	221	75	4	13
DW27x32	23.1-32	10	24.5	275	221	19	6	16
DW27x32	28.4-32	10	24	335	281	79	6	16
DW27x32	28.4-32	10	24	335	281	124	6	16
DW27x32	28.4-32	10	22	335	281	101	6	16
DW15x34	16.9-34	8	20	275	200.5	110	5	12-14
W16x38	18.4-38	8	21	275	221	165	5	16
W16x38	18.4-38	8	21	275	221	20	5	12
W18x38	20.8-38	10	25	530	476	595.5	6	18
W18x38	20.8-38	10	24.5	275	221	150	5	16